

DEVELOP

Dynamic balance

ineo 3300P/4000P/4700P

monochrome | 33/40/47 ppm



Enhanced efficiency in office printing

The ineo 3300P, 4000P and 4700P series printers give you fast B&W output and a feature set sure to boost productivity in your work environment. Ready to meet the needs of executive suites or busy workgroups, these easy-to-use compact printers will effectively handle your document output.

High speeds in minimum space

Produce high quality 1,200 x 1,200 dpi resolution documents at speeds up to 47 ppm. Spend less time waiting for prints with a fast 6.5 second first print output-time with instant-on fuser technology and fast processing with memory expandable up to 1.28 GB. Designed for compact desktop placement, the ineo 3300P, 4000P and 4700P carry a small footprint of only 0.15 m² and lightweight design up to 16 kg. This allows you to easily position your printer in your work environment.

Highly featured for maximum productivity

Take advantage of a range of productivity-boosting features. Automatic duplexing is standard across the range for cost-effective two-sided printing. Save on your paper usage with automatic removal of blank pages from your print sets or number-up combination printing for multiple pages on one sheet. Address the needs of your mobile workforce with Direct Print from a USB flash drive (ineo 4700P model only). Protect your confidential prints from unauthorised access with Secure Print - requiring you to authenticate before job output (ineo 4000P and 4700P only). Automatically insert separator sheets, between print-sets or individual pages.



Front view of ineo 4000P as standard



Front view of ineo 3300P as standard

Intuitively usable: an award-winning print experience

An easy to read 2.4-inch colour LCD display on the ineo 4000P and ineo 4700P provides animated navigation screens to make operation easy. The ineo 3300P is fitted with a simple 3-button, 6-LED display panel for clear interpretation of device status. The award-winning MyTab print driver, a feature on all DEVELOP products, allows each user to customise their print driver based on their individual print needs.

Versatile media handling for exact-fit suitability

Meet your business needs with expandable paper capacity supporting a range of media. The ineo 4700P gives you standard input capacity of 650-sheet – expandable to 2,300-sheets for high-volume print output. Print on a variety of small paper sizes with support for A6– A4 sizes. The 100-sheet bypass tray can handle thin 60 g/m² paper up to cover stock of 163 g/m², and thick envelopes.

Expand your capabilities with Solution Cards

Expand your printer's capabilities with one of two Solution Cards (available on ineo 4000P and 4700P only). The UK-Po2 allows users to convert existing data into custom-designed forms capable of containing variable text, images, and barcodes. This Solution Card provides your printer with native support for more than 47-types of industry-standard barcodes. The UK-Po3 provides host-to-printer support in IBM iSeries server environments.



ineo 4700P fitted with three additional PF-P12 paper trays for 2,300-sheet input



ineo 3300P/4000P/4700P

GENERAL DATA

Type of machine

Monochrome A4 Laser Printer

Printing speed

- > Maximum A4
 - ineo 3300: 33 ppm
 - ineo 4000: 40 ppm
 - ineo 4700: 47 ppm

Print system

LED

Paper feeder

- > Standard:
 - ineo 3300: 300 sheets, max. 850 sheets
 - ineo 4000: 350 sheets, max. 2,000 sheets
 - ineo 4700: 650 sheets, max. 2,300 sheets
- > 250/250/550-sheet universal cassette (A6-A4, 120-90 g/m²)
- > 50/100/100-sheet bypass (A6-A4, 60-163 g/m²) paper (including recycled paper), labels, envelopes, transparencies, card stock

Paper format

Max. 216 x 356 mm

Printable area

206 x 346 mm

Dimensions (w x d x h)

- ineo 3300/4000: 399 x 382 x 263 mm
- ineo 4700: 399 x 382 x 306 mm

(without options)

Weight

14/15/15.7 kg (main body with consumables)

Power

220-240 V / 50 Hz

PRINT SPECIFICATIONS

Controller

Standard: Dual core controller with 800 MHz

Memory

- ineo 3300: 128 MB
- ineo 4000/4700: 256 MB, max. 1.28 GB

Resolution

Max. 1,200 x 1,200 dpi

Network protocols

TCP/IP (IPv4, IPv6); IPP, SNMP, HTTP, HTTPS

Emulation

PCL5, PCL 6, PostScript 3, XPS

Interfaces

- ineo 3300: IEEE 1284 Bidirectional parallel, USB 2.0, Ethernet 10-Base-/100-Base-TX
- ineo 4000/4700: USB 2.0, Ethernet 10-Base-T/100-Base-TX/1000-BaseT

Driver

Windows XP (32/64), Windows Vista (32/64), Windows 7 (32/64), Windows 8 (32/64), Windows Server 2003/2008 (32/64), Windows Server 2008 R2 (64), Mac OS 10.x, Linux, Citrix (available approx. July 2013), SAP, AS/400


Print functions

Automatic Duplexing, Number-Up, Combination Print, Watermark, Sorting, Sheet Insertion, Secure Print (ineo 4000P/4700P only), USB Direct Print (ineo 4700P only)


OPTIONS

- > 250-sheet cassette (A5/A4, 60-120 g/m²)
- > 550-sheet cassette (A5/A4, 60-120 g/m²)
- > Forms and Barcode card
- > AFP/IPDS card
- > 512 MB memory extension
- > 1 GB memory extension
- > 256 MB User Flash
- > Wireless LAN

ineo 3300P

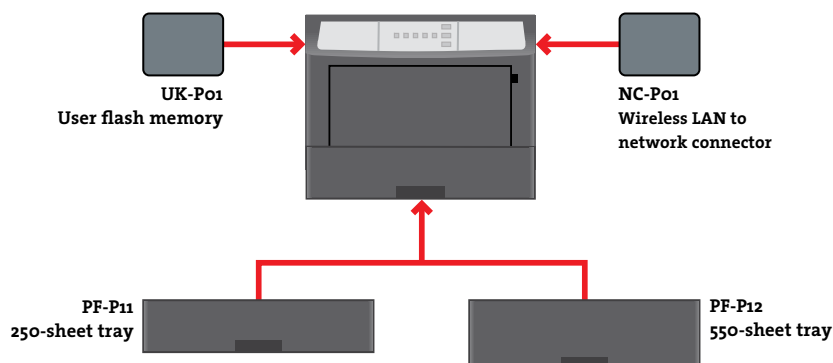

ineo 4000P/4700P

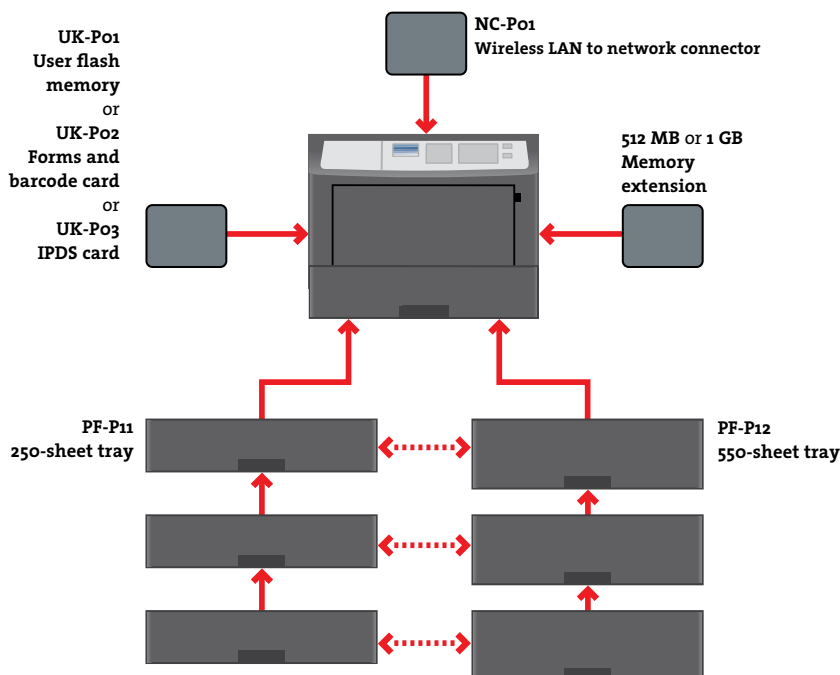

DEVELOP

Distributed in Australia by:

Head Office: Imagetec Solution Australia Pty Ltd

Level 1, 67 Epping Road, North Ryde NSW 2113

Sales: 13 COPY

Service: 1300 787 877

www.imagetec.com.au

Sydney • Brisbane • Melbourne • Adelaide • Perth

imagetec

SUBSTANCE MEETS SERVICE

